

XIAO nRF52840: pin map for xiao-devicetree

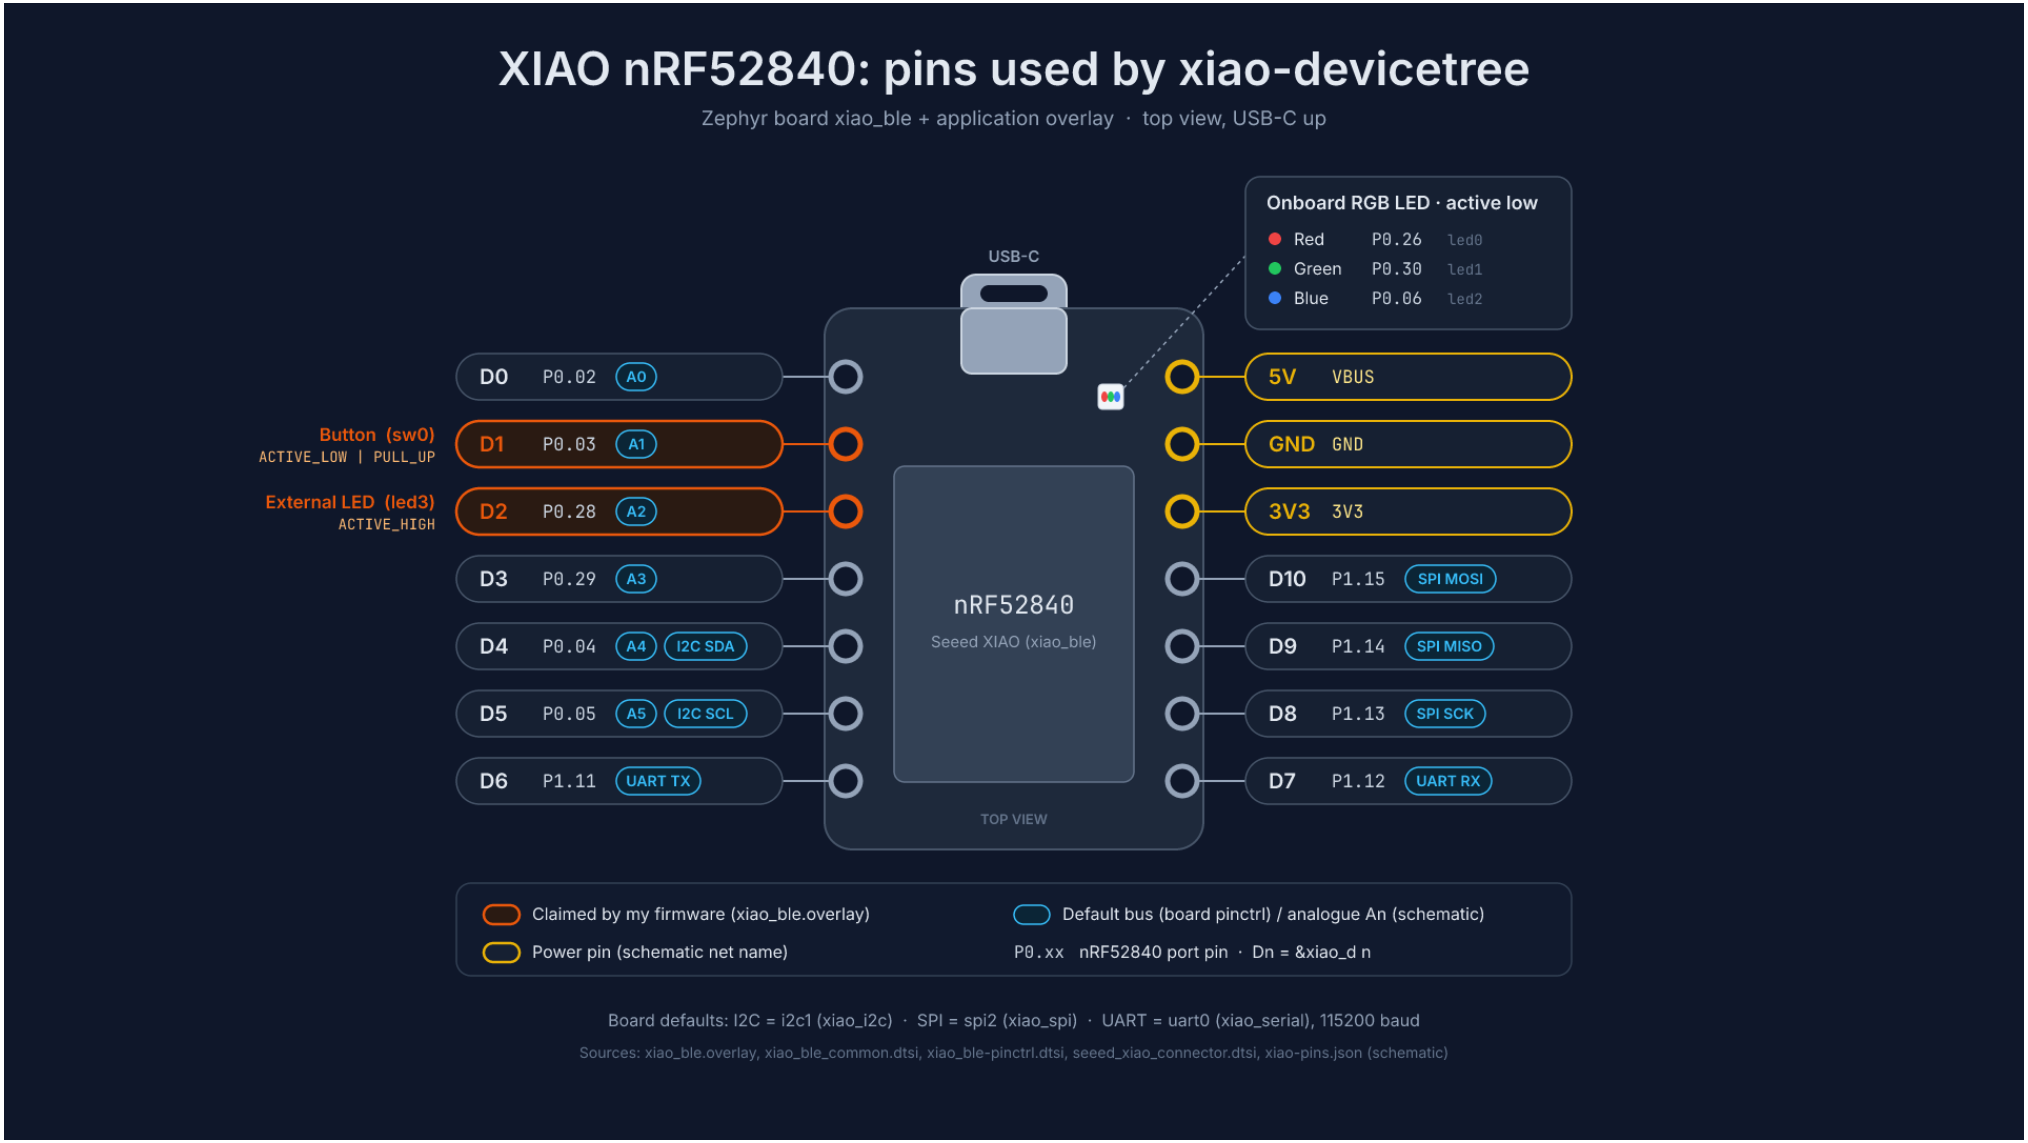

Wiring and build

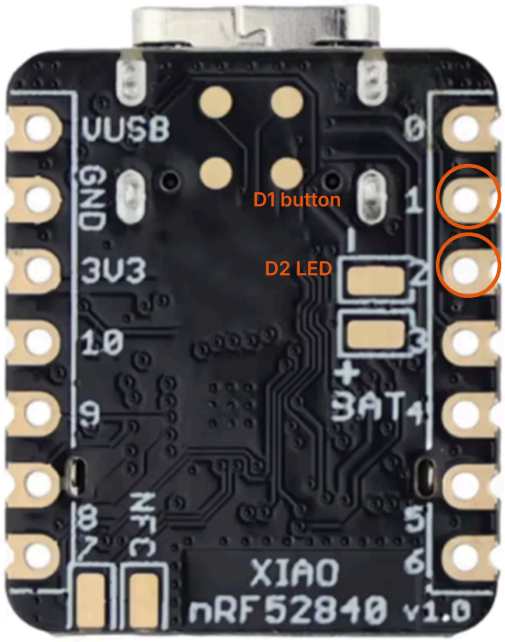

External LED: D2 (P0.28) to 1 kOhm to LED anode, LED cathode to GND. Active high.

Button: D1 (P0.03) to GND. Active low, internal pull-up.

Build:
west build -b xiao_ble xiao-devicetree -d build-xiao --pristine

Flash: double-tap reset, copy build-xiao\zephyr\zephyr.uf2 to the XIAO-SENSE drive.

Source of pin data: Seeed XIAO nRF52840 Sense v1.1 schematic, cross-checked against Zephyr's seeed_xiao_connector.dtsi.